

TASK RANGE

EXTRA HIGH BACK

NS40	non tilt seat
NS45	tilt seat
NS46	3 paddle mech

NS46M2S5 shown



HIGH BACK

NS30	non tilt seat
NS35	tilt seat
NS36	3 paddle mech

NS36M2 shown



MEDIUM BACK

NS20	non tilt seat
NS25	tilt seat
NS26	3 paddle mech

NS20 shown



A5
Height adjustable arm



A14
Loop arms

DRAFTING

NS20D3	non tilt seat
NS26D3	3 paddle mech

NS20D3 shown



L6



Not all models have AFRDI certification. AFRDI certificates for select models available upon request.

DIMENSIONS	Back Size	Seat Size	Height
	Extra high 495 W x 580 H High 444 W x 500 H Medium 435 W x 400 H	500 W x 460 D	Typist / Clerical 450 - 580 Drafting standard 560 - 760 Drafting high lift 630 - 890
OPTIONS	Option codes must be placed in alphabetical order after chair code. See page 12 for option details	A14 - Standard loop arms A5 - Height adjustable arms B1 - Polished aluminium base C1 - Brake castors (carpet floors) C2 - Brake castors (hard floors)	C5 - Glides D1 - Aluminium footing /Standard drafting D2 - Aluminium footing /High Lift drafting D3 - Black plastic footing /Standard drafting D4 - Black plastic footing /High lift drafting

www.sturdy.com.au OPTIONS

TASK RANGE

Option codes must be placed in alphabetical order after chair code.



A5
Height adjustable arm



A14
Loop arm



B1
Polished aluminium
base



C1
Brake castors
(carpet floors)



C2
Brake castors
(vinyl floors)




C5
Glides



D1 & D2
Aluminium footring



D3 & D4
Black plastic footring



E
Ergosit seat cushion



M2
Ratchet mechanism



S6
Larger seat option




SLIDE SEAT INSTRUCTIONS

The Slide Seat mechanism allows the seat to slide forward increasing the seat depth by 50mm. It offers 5 locking positions.

As depth between the back and seat increases it allows larger people more comfort.

To operate simply lift the handle and slide the seat forward or backward to adjust into a one of the 5 locking positions. The mechanism should find each locking position without any force necessary.

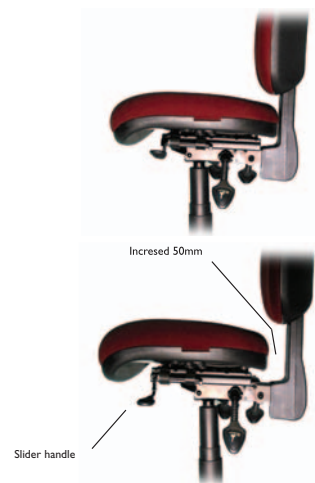

Sturdy Framac pursue a policy of continuous improvement and reserve the right to introduce modification when required and to withdraw models without previous notification.

Sturdy Components Pty Limited trading as
Sturdy Framac
www.sturdy.com.au

95 Gow Street, Padstow
 NSW 2211, Australia
 Telephone 02 9790 3500
 Facsimile 02 9707 1081
 email sales@sturdy.com.au